

[HTTP://WWW.SOLARS-CHINA.COM](http://www.solars-china.com)

25W AMORPHOUS SILICON SOLAR MODULE


ELECTRICAL CHARACTERISTICS

Cell Type	A-Si thin film solar module
Norminal Power	Pmax=25W
Open Circuit Voltage	Voc=26.7
Short Circuit Current	Isc=1890mA
Voltage at Pmax	Vm=18V
Current at Pmax	Im=1388mA
Temp.Coefficient/Pm	-(0.19±0.03)%/°C
Temp.Coefficient/Vm	-(0.34±0.04)%/°C
Temp.Coefficient/Im	(0.08±0.02)%/°C
STANDARD TEST CONDITIONS(STC:Irradiance 1000W/m ² , Module temperature 25 degrees centigrade,AM 1.5) Power Tolerance: ±5%	


RELIABILITY STATISTICS

Operating Temperature Range	-40°C to +90°C
Humidity & Temperature Test	85°C & 85% humidity 1000h
Junction Box	IP65 rated
Outstanding performance under low light irradiance	

PERFORMANCE & IRRADIANCE CURVE

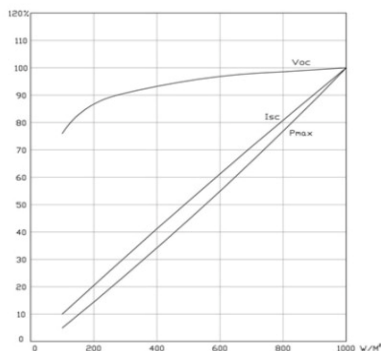

DIMENSIONS

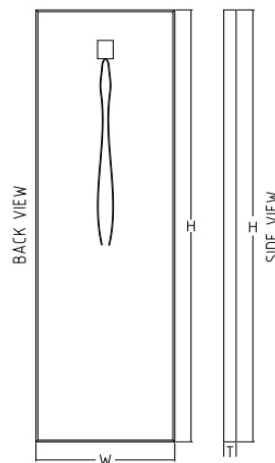

Item No: **KS-A25W**

H	W	T
1275mm/50.19"	385mm/15.26"	26mm/1.02"

MECHANICAL SPECIFICATIONS

Dmensions(H*W*T) as above	1275*385*26mm
Weight	3.5kg
Front Cover	TCO Glass
Back Cover	PET
Frame	Sliver anodized aluminum
Output Lead Wire	Waterproof wire

APPEARANCE SPECIFICATIONS

Delaminations or bubbles do not form a continuous path between any part of the electrical circuit and the edge of module
No any cracks, scratch or perforation in the glass or the backsheet

PROPERTY FOR SYSTEM DESIGN

Series Fuse Rating	2A
Maximum System Voltage	600V
Module Life	90% output for 10 years, 80% for 20 years
Recommended applications for Off-grid systems	

THE TECHNICAL FILES PROVIDED BY CHINA SOLAR LTD

Design and specifications are subject to change without notice

Office Address:
N0.401,ZhongKang Pioneer Park,ZhongKang Road,
Futian District, ShenZhen City,Guangdong Province,China
Factory Address:
Longxi Hi-tech Industrial Park, Longcheng Road, Longgang
Town, ShenZhen City,Guangdong Province,China



CHINA SOLAR LTD

<http://www.solars-china.com>
<http://www.solars-china.net>
Tel: +86.755.8351 5659
Fax: +86.755.8271 6024
E-mail: market@solars-china.com